




CEMENTITIOUS TILE ADHESIVES

India's most advanced tile fixing systems
CONSISTENTLY OUTSTANDING



Modern tiles have evolved considerably in the past decades and the available range of finishes just keeps expanding day by day. Not only the texture, pattern and the visual appearance of tiles have changed but so have their compositions. To accommodate our everlasting desire for the next best thing, tile manufacturers have developed a plethora of products that meet the multivariate needs of the modern consumer. Consequently, tile installation systems have had to adapt too, and meet the rigorous demands and comply with multitude of parameters to ensure appropriate fixing of tiles. At FixCera we have developed the most advanced adhesives that guarantee results.

*1 Brand, 5 Categories, 15 Products, 50+
Parameters Evaluated For Each*

**CONSISTENTLY OUTSTANDING
GUARANTEED**

WHY CHOOSE FIXCERA ADHESIVES?

Innovation

FixCera has developed the most advanced tile adhesives in the market. The company invests heavily in research and development and has a dedicated Product Development Facility equipped with cutting-edge instruments and manned with leading technology experts.



Strict Manufacturing Practices

From sourcing raw materials till testing finished goods, all products are manufactured under strict supervision and control, this strict monitoring allows us to deliver outstanding products consistently.

Certification and Compliance

All FixCera Tile Adhesives are compliant and exceed the demands of major standards published worldwide. The most widely regarded of these are: IS15477, ANSI A118, and EN 12004.



Assured Warranties


All FixCera products are covered under a minimum 1 year limited warranty, so you can tackle any project with a complete peace of mind.

Table of contents

All Purpose Tile Adhesives	6
<hr/>	
General Purpose Tile Adhesives	15
<hr/>	
Water Repellent Tile Adhesives	21
<hr/>	
Stone Adhesives	28
<hr/>	
Specialized Tile Adhesives	33
<hr/>	
CTA Recommendation Chart	39
<hr/>	

CATEGORY I: ALL PURPOSE TILE ADHESIVES

- ***FixCera XV***
- ***FixCera XL***
- ***FixCera Limitless XL***
- ***FixCera T1T***

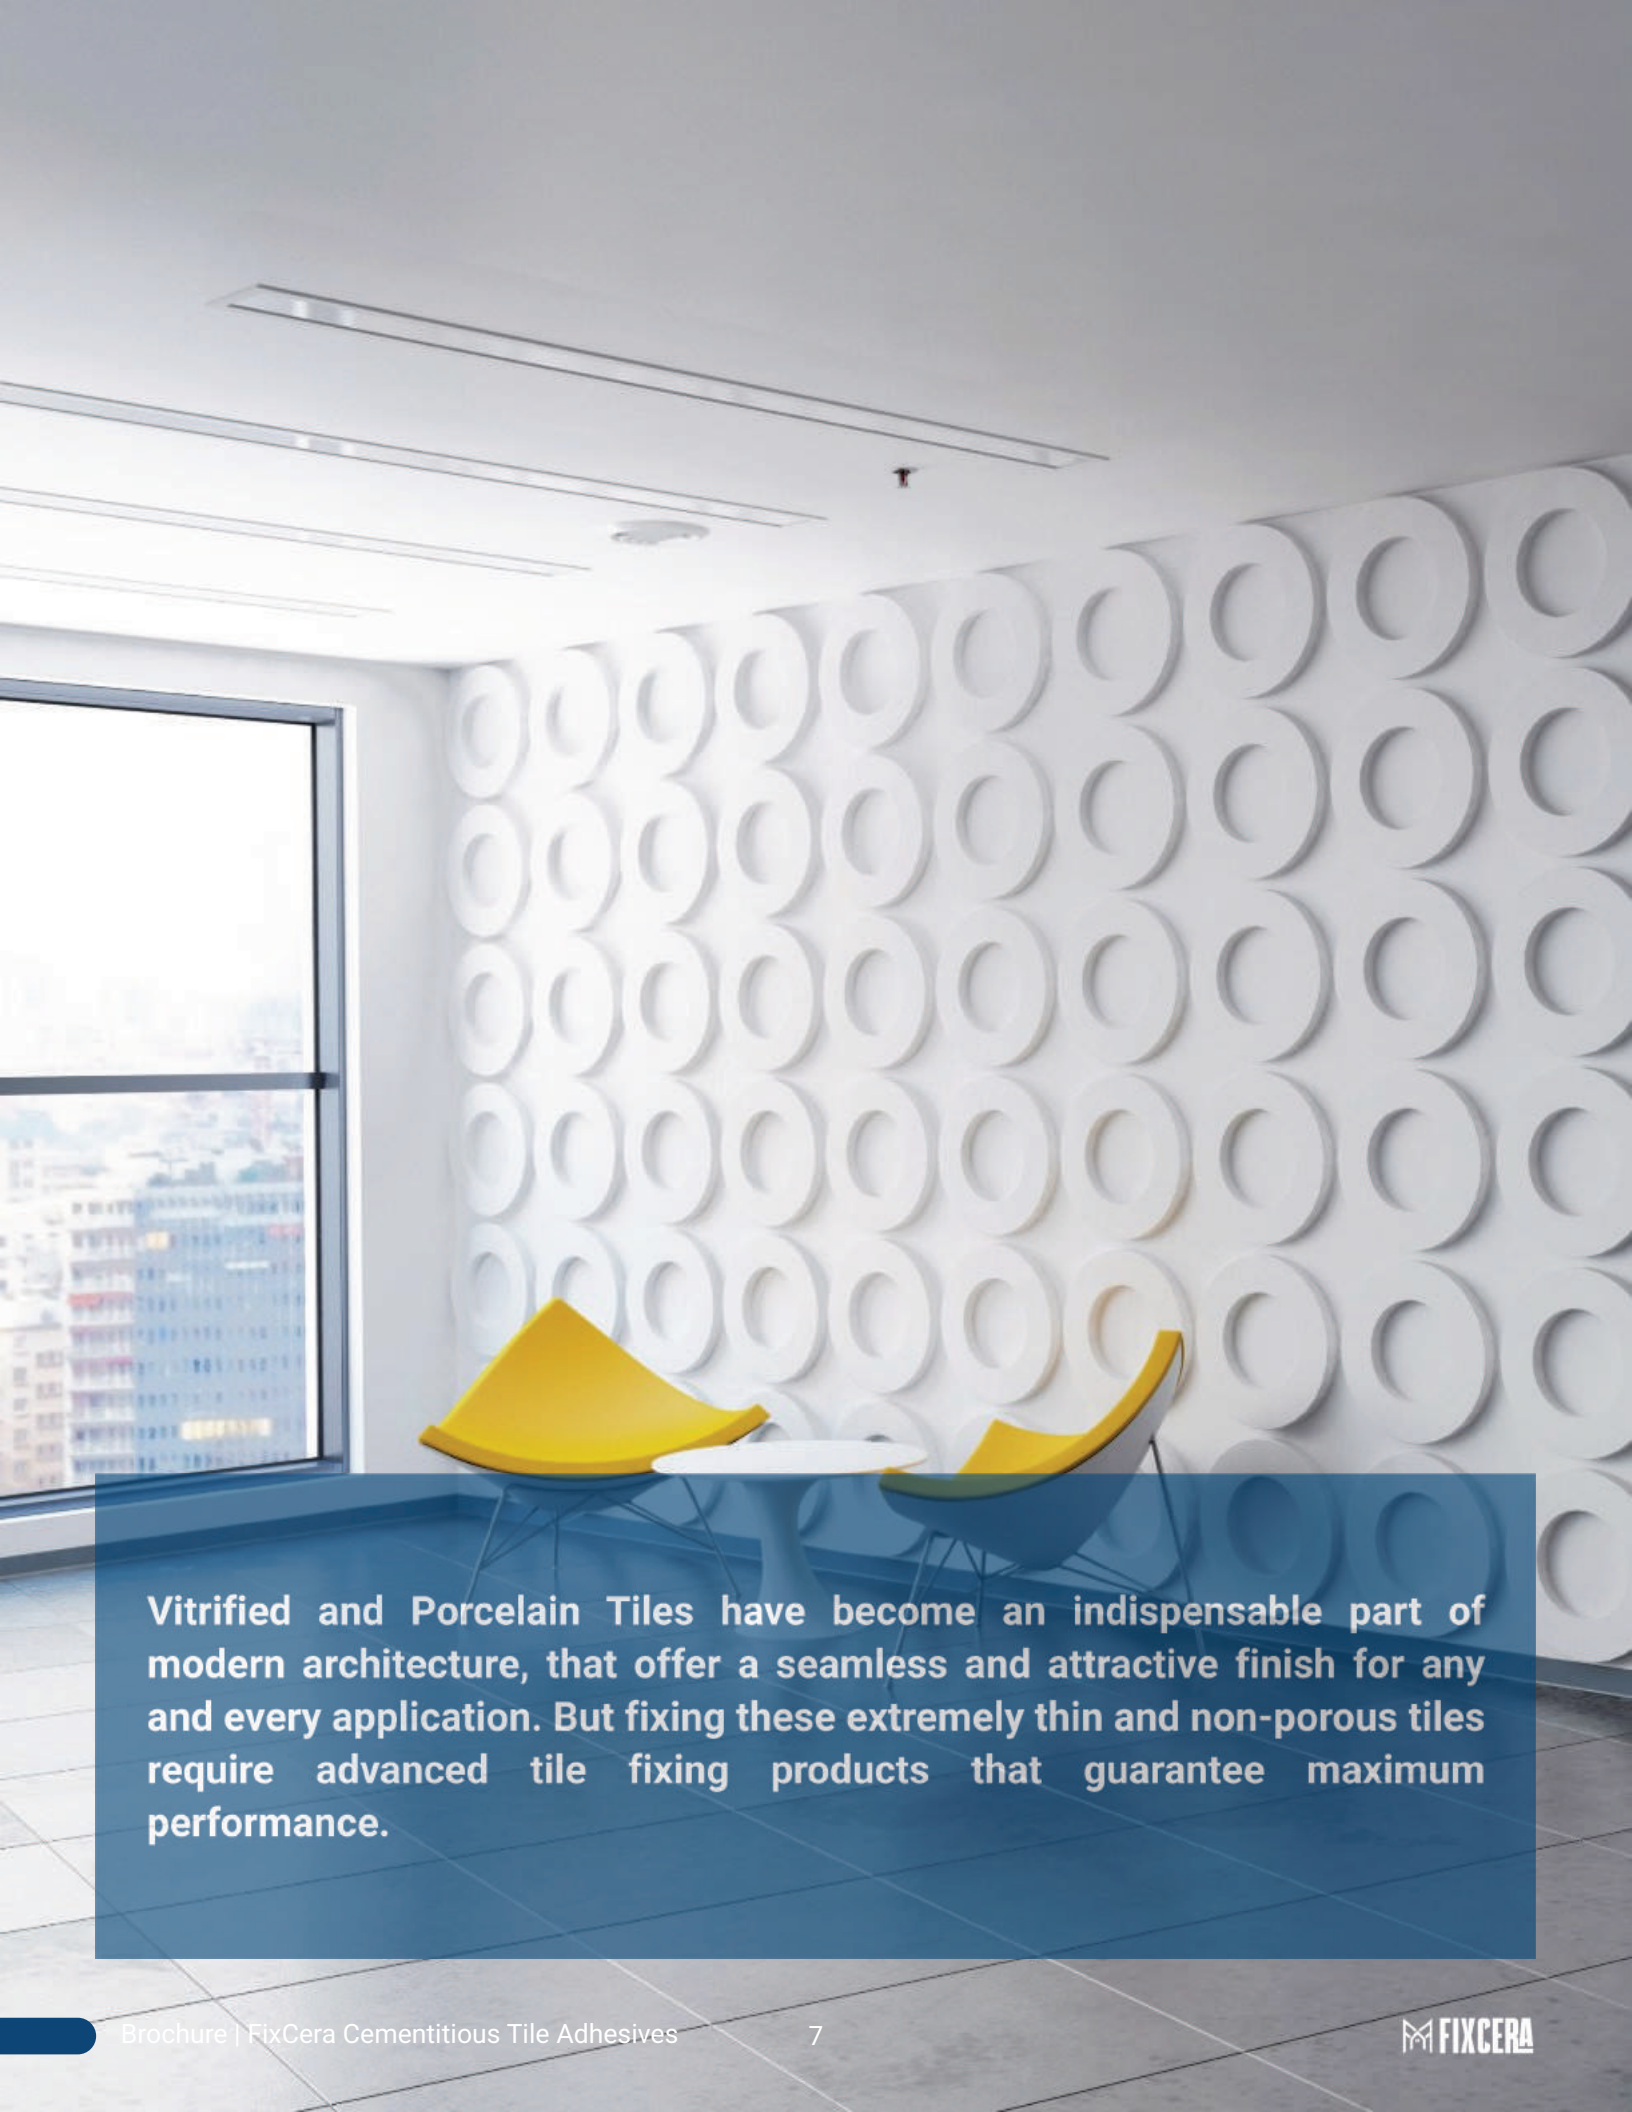

Vitrified and Porcelain Tiles have become an indispensable part of modern architecture, that offer a seamless and attractive finish for any and every application. But fixing these extremely thin and non-porous tiles require advanced tile fixing products that guarantee maximum performance.

TILING IN INTERIOR AND EXTERIOR AREAS

FIXCERA XV



MULTIPURPOSE EXTERIOR TILE ADHESIVE

Highly polymer modified tile adhesive for fixing all types of tiles in interior and exterior areas

Also suitable for fixing new tiles over existing tiles and for installing tiles in wet areas


Features and Benefits

- Suitable for all types of tiles
- Suitable for most natural stones
- Ideal for exterior environments
- Bonds well to various substrates
- Single component product
- Excellent workability
- Suitable for use in wet areas
- Shock resistant

Application Data

- Mixing Ratio: Approximately 5.5L water/ 20kg bag
- Coverage: 5 - 5.5 m²/ 20kg bag (3mm bed)
- Wet Area Recommended: Yes
- Colour: Grey and White
- Shelf Life: 12 months from manufacturing
- Pot Life: Approximately 4 hours
- Open Time: 30 minutes
- Adjustment Time: 40 minutes


Compliance/ Certifications: ANSI A118.4TE, C2TE - EN 12004, Type 3T Adhesive - BIS 15477:2019



Large Format Tiles offer a consistent and flawless look to any surface, be it floor or wall. But ensuring that these tiles last requires flexible adhesives that can accommodate for small movements in the substrate. As per the Indian Standard IS 15477, when laying tiles or stones of dimensions equal to or greater than 600mm x 600mm, it is recommended to use an adhesive with S1 classification, that can accommodate for movements between the tile and substrate.

TILING WITH LARGE FORMAT TILES OR STONES

FIXCERA XL

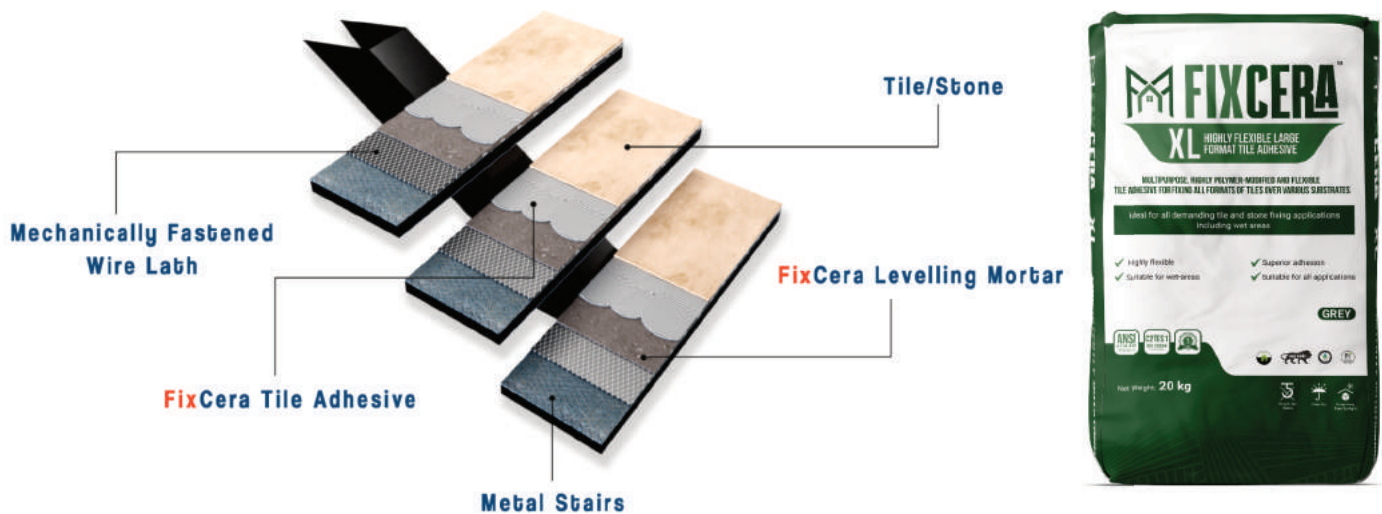

HIGHLY FLEXIBLE LARGE FORMAT TILE ADHESIVE

Multipurpose, highly polymer modified and flexible tile adhesive for fixing all formats of tiles

Ideal for demanding tile and stone fixing applications such as exterior facade or large format tile installation


Features and Benefits

- Excellent slump resistance
- Deformable up to 3mm
- Excellent sag resistance
- Bonds well to various substrates
- High tensile adhesion after water immersion
- High tensile adhesion after heat ageing
- High performance under all weather conditions
- Ideal for fixing large format tiles/ stones

Application Data

- Mixing Ratio: Approximately 6.0L water/ 20kg bag
- Coverage: 5 - 5.5m²/ 20kg bag (3mm bed)
- Wet Area Recommended: Yes
- Colour: Grey and White
- Shelf Life: 12 months from manufacturing
- Pot Life: Approximately 5 hours
- Open Time: 35 minutes
- Adjustment Time: 40 minutes


Compliance/ Certifications: ANSI A118.4TE, C2TES1 - EN 12004, Type 3TS1 Adhesive - BIS 15477:2019

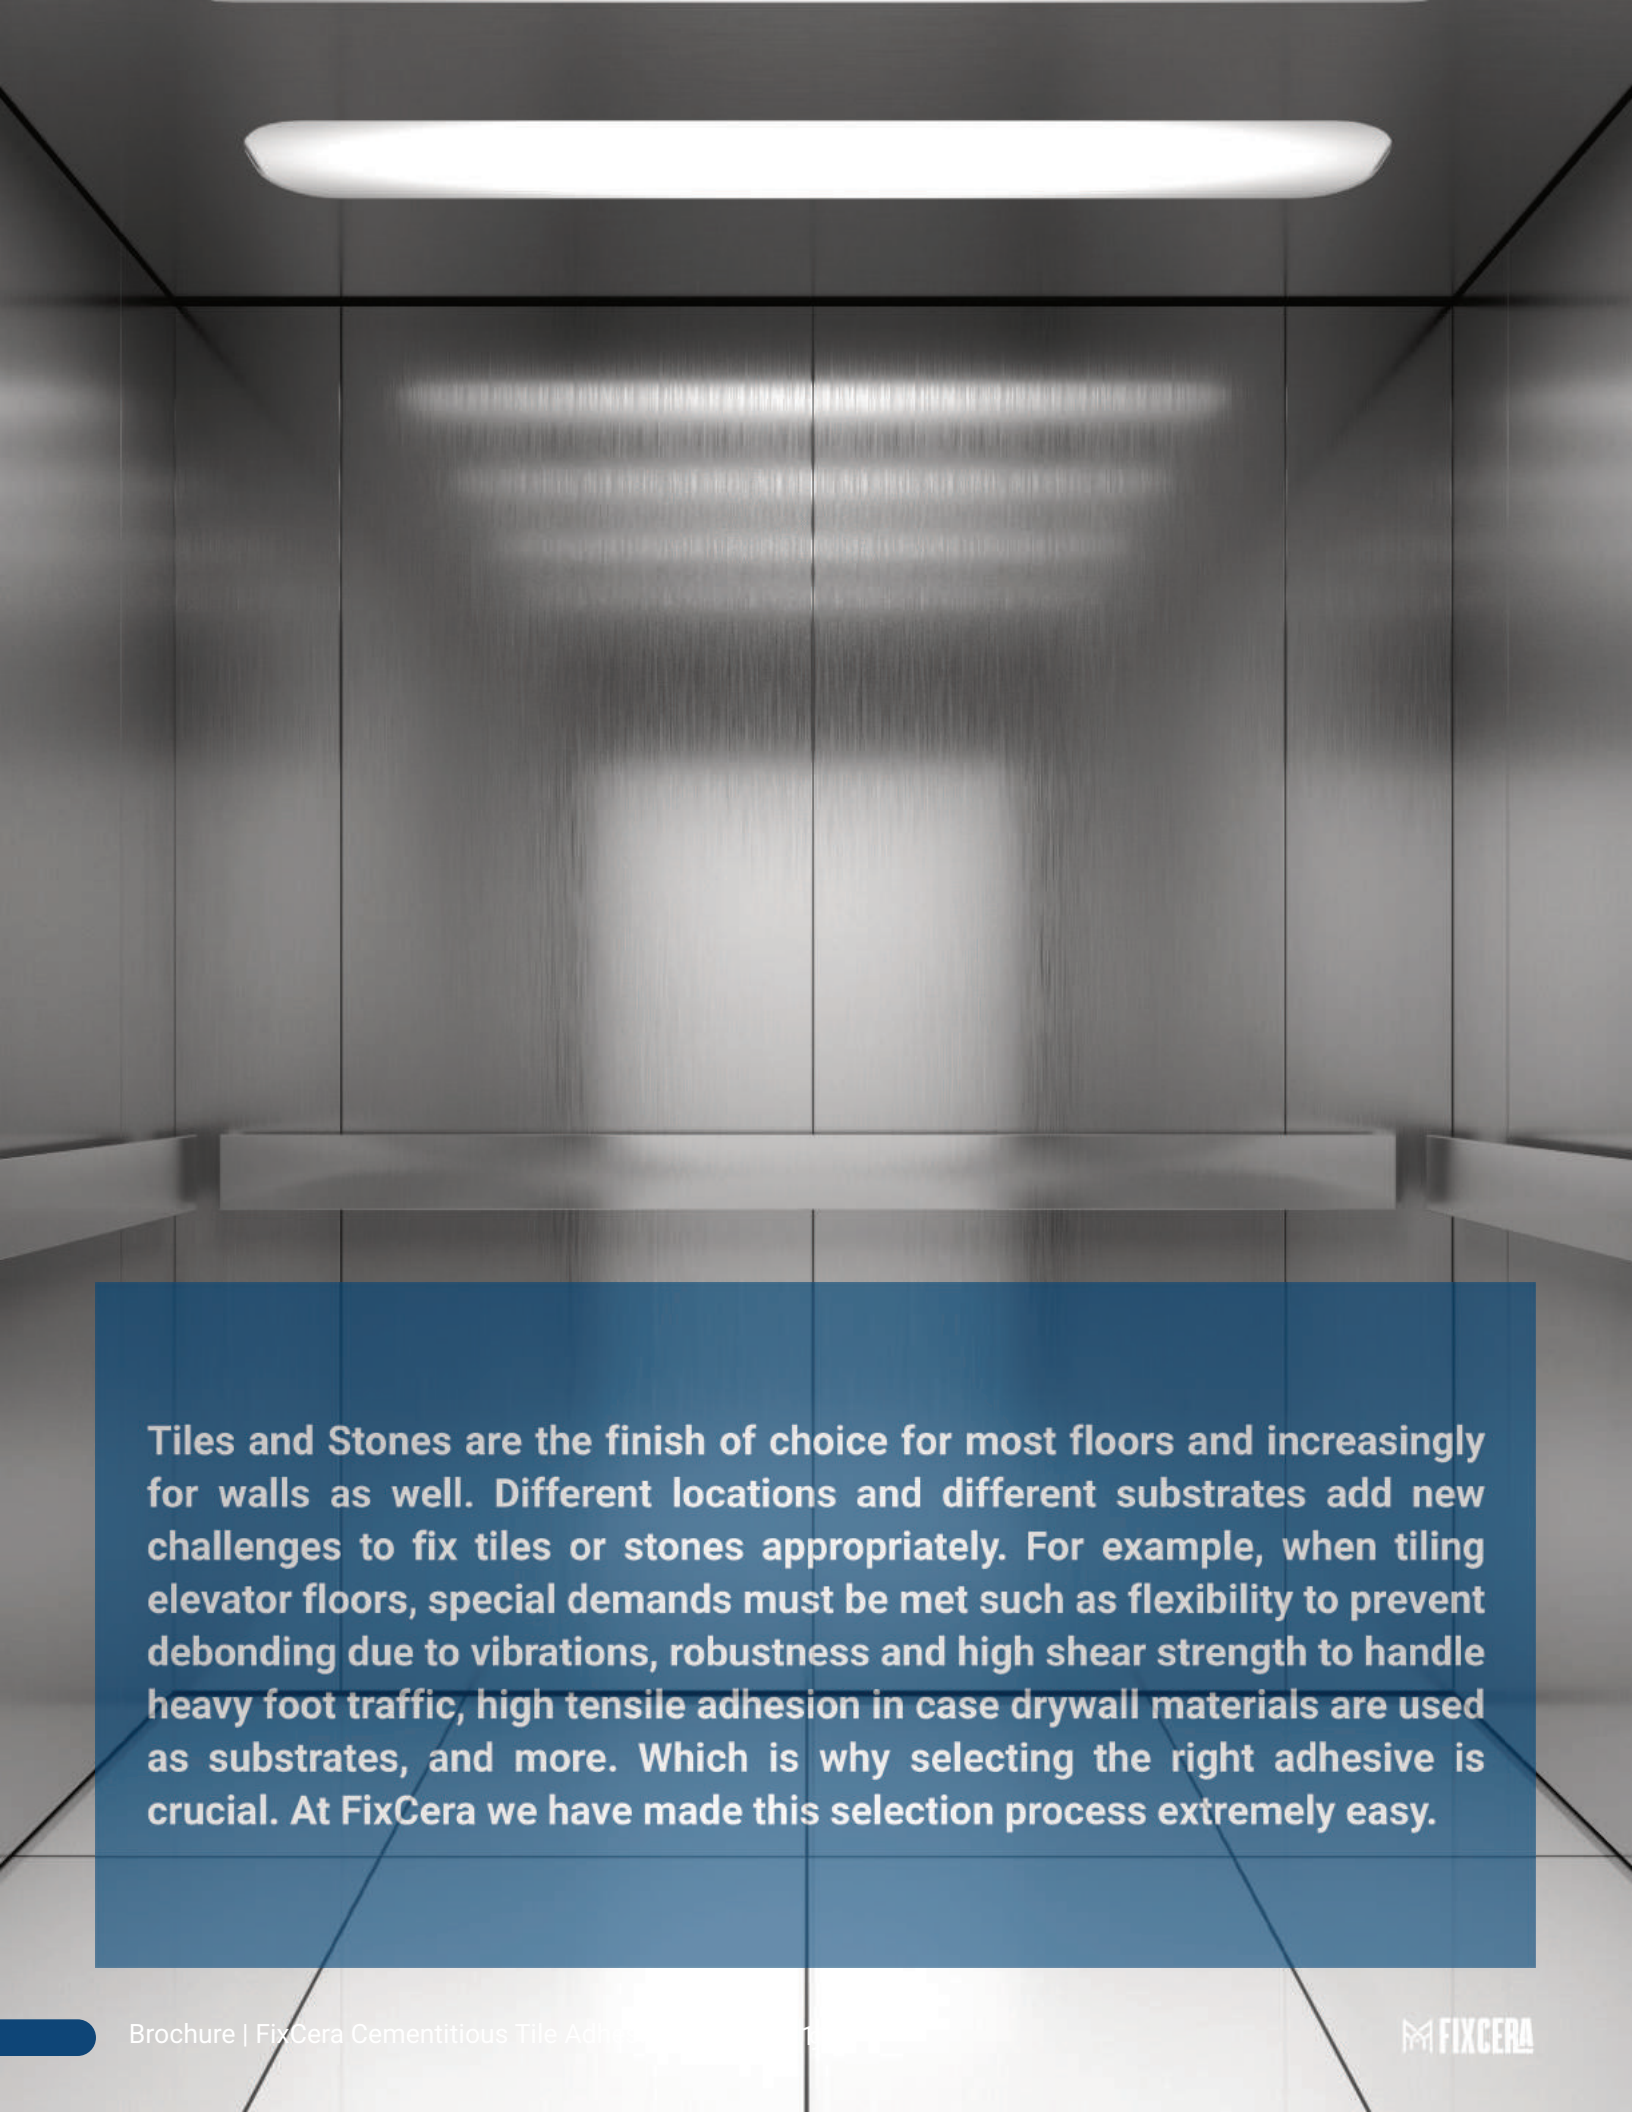

Tiles and Stones are the finish of choice for most floors and increasingly for walls as well. Different locations and different substrates add new challenges to fix tiles or stones appropriately. For example, when tiling elevator floors, special demands must be met such as flexibility to prevent debonding due to vibrations, robustness and high shear strength to handle heavy foot traffic, high tensile adhesion in case drywall materials are used as substrates, and more. Which is why selecting the right adhesive is crucial. At FixCera we have made this selection process extremely easy.

FIXING TILES IN CHALLENGING AREAS

FIXCERA LIMITLESS XL

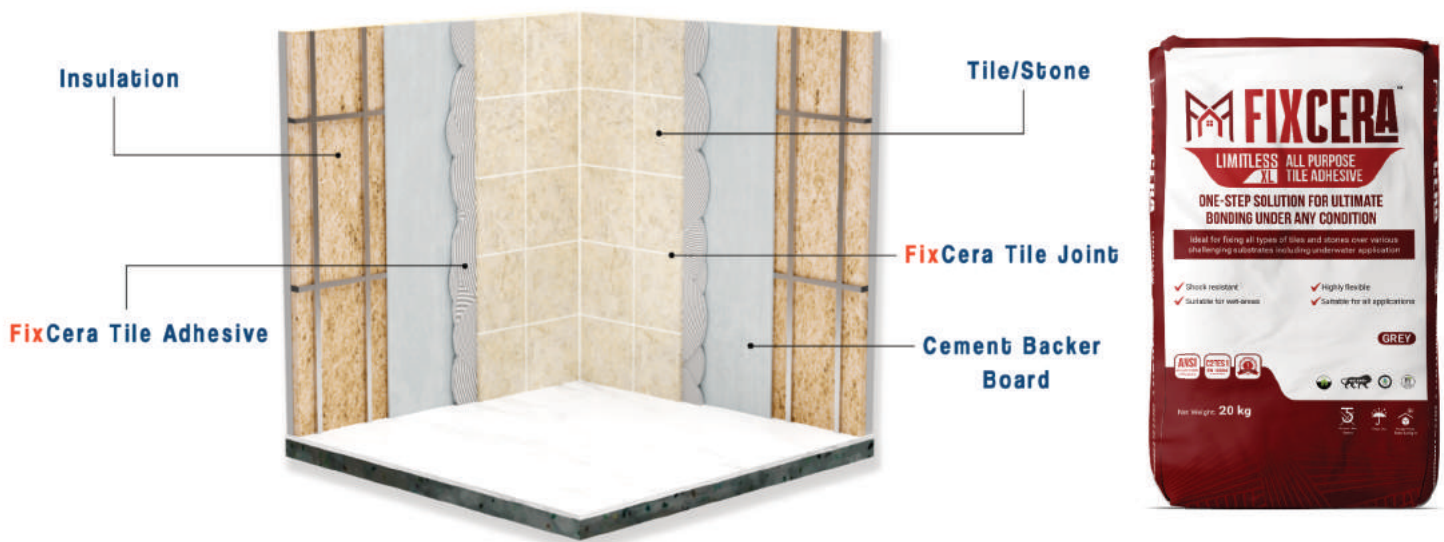

TRUE ALL PURPOSE TILE ADHESIVE

One step solution for ultimate bonding under any condition

Ideal for fixing all types of tiles/ stone under most conditions including drywalls and underwater areas


Features and Benefits

- Maximum adhesion
- High flexibility
- Ideal for challenging environments
- Ideal for interior and exterior use
- Bonds to various dry walls directly
- Single component product
- Ideal for wet areas
- Water and shock resistant

Application Data

- Mixing Ratio: Approximately 6.0L water/ 20kg bag
- Coverage: 5 - 5.5 m²/ 20kg bag (3mm bed)
- Wet Area Recommended: Yes
- Colour: Grey and White
- Shelf Life: 12 months from manufacturing
- Pot Life: Approximately 4 hours
- Open Time: 30 minutes
- Adjustment Time: 40 minutes


Compliance/ Certifications: ANSI A118.4TE/11(EGP), C2TES1 - EN 12004, Type 3T Adhesive - BIS 15477:2019



Renovation is a hefty task as it is, and replacing a tiled floor or wall with new tiles only makes it worse. But to the consumer's benefit it is now possible with modern Tile Adhesives to simply fix new tiles over existing tiles ascribed to their enhanced adhesion even onto smooth non-absorbent surfaces.

FIXING NEW TILES OR STONES OVER EXISTING TILES

FIXCERA T1T

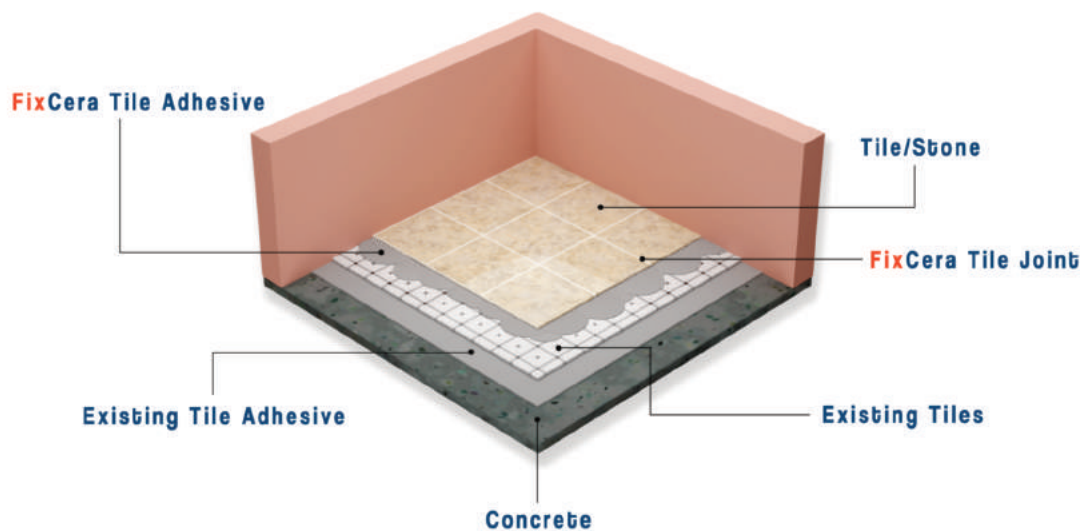

TILE ON TILE ADHESIVE

Optimized solution for fixing new tiles over existing tiles or natural stones

Also suitable for fixing all types of tiles and natural stones in interior or exterior areas including wet areas

Features and Benefits

- Optimized for tile over tile application
- Multi-purpose, suitable over many substrates
- Slip resistant
- Polymer modified
- Single component product
- Excellent workability
- High bond strength
- Eco-friendly and recyclable

Application Data

- Mixing Ratio: Approximately 5.5L water/ 20kg bag
- Coverage: 5 - 5.5 m²/ 20kg bag (3mm bed)
- Wet Area Recommended: Yes
- Colour: Grey and White
- Shelf Life: 12 months from manufacturing
- Pot Life: Approximately 4 hours
- Open Time: 30 minutes
- Adjustment Time: 35 minutes

Compliance/ Certifications: ANSI A118.4TE, C2TE - EN 12004, Type 3T Adhesive - BIS 15477:2019

CATEGORY II: GENERAL PURPOSE TILE ADHESIVES


- ***FixCera Eco***
- ***FixCera Eco V***
- ***FixCera XF***



For certain indoor applications and for certain types of absorbent small and medium format tiles and stones, Tile Adhesives of economical range are usually sufficient to achieve the desired long term results.

FIXING CERAMIC TILES ON INTERIOR FLOORS

FIXCERA ECO

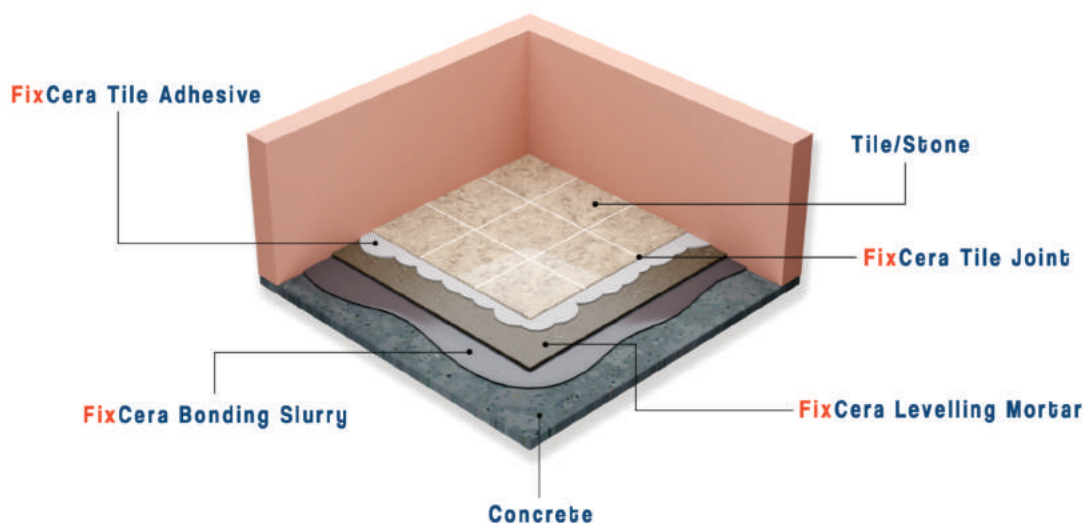

ECONOMICAL FLOOR AND WALL TILE ADHESIVE

Durable and economical thin-set tile adhesive for fixing ceramic tiles on interior floors and walls

Also suitable for fixing small and medium sized natural stones in interior areas

Features and Benefits

- Cost efficient
- Ideal for new floor installation
- Best suited for ceramic tiles
- Bonds well to most cement based substrates
- Single component product
- Excellent workability
- > 0.5N/mm² tensile bond strength
- Eco-friendly and recyclable

Application Data

- Mixing Ratio: Approximately 5.5L water/ 20kg bag
- Coverage: 5 - 5.6 m²/ 20kg bag (3mm bed)
- Wet Area Recommended: No
- Colour: Grey
- Shelf Life: 12 months from manufacturing
- Pot Life: Approximately 3 hours
- Open Time: 20 minutes
- Adjustment Time: 20 minutes

Compliance/ Certifications: ANSI A118.1T, C1T - EN 12004, Type 1T Adhesive - BIS 15477:2019

FIXING CERAMIC TILES ON INTERIOR WALLS

FIXCERA ECO V



ECONOMICAL NON SAG TILE ADHESIVE

Durable thin set tile adhesive for fixing semi vitreous tiles on interior floors and walls

Also suitable for fixing small and medium sized natural stones and ceramic tiles in interior areas


Features and Benefits

- Cost efficient
- Improved sag resistance
- Best suited for ceramic tiles
- Bonds well to most cement based substrates
- Single component product
- Excellent workability
- Ideal for fixing small/ medium tiles in interior areas

Application Data

- Mixing Ratio: Approximately 5.5L water/ 20kg bag
- Coverage: 5 - 5.6 m²/ 20kg bag (3mm bed)
- Wet Area Recommended: No
- Colour: Grey and White
- Shelf Life: 12 months from manufacturing
- Pot Life: Approximately 3 hours
- Open Time: 20 minutes
- Adjustment Time: 20 minutes


Compliance/ Certifications: ANSI A118.1T, C1T - EN 12004, Type 1T Adhesive - BIS 15477:2019



Installing large tiles on walls has usually been a challenging task to say the least. However, FixCera's adhesive systems don't only accommodate the demanding requirements for a lasting wall but also significantly improve the installation process with long adjustment times, easy workability and excellent sag resistance.

TILING INTERIOR AREAS WITH LARGE TILES OR STONES

FIXCERA XF

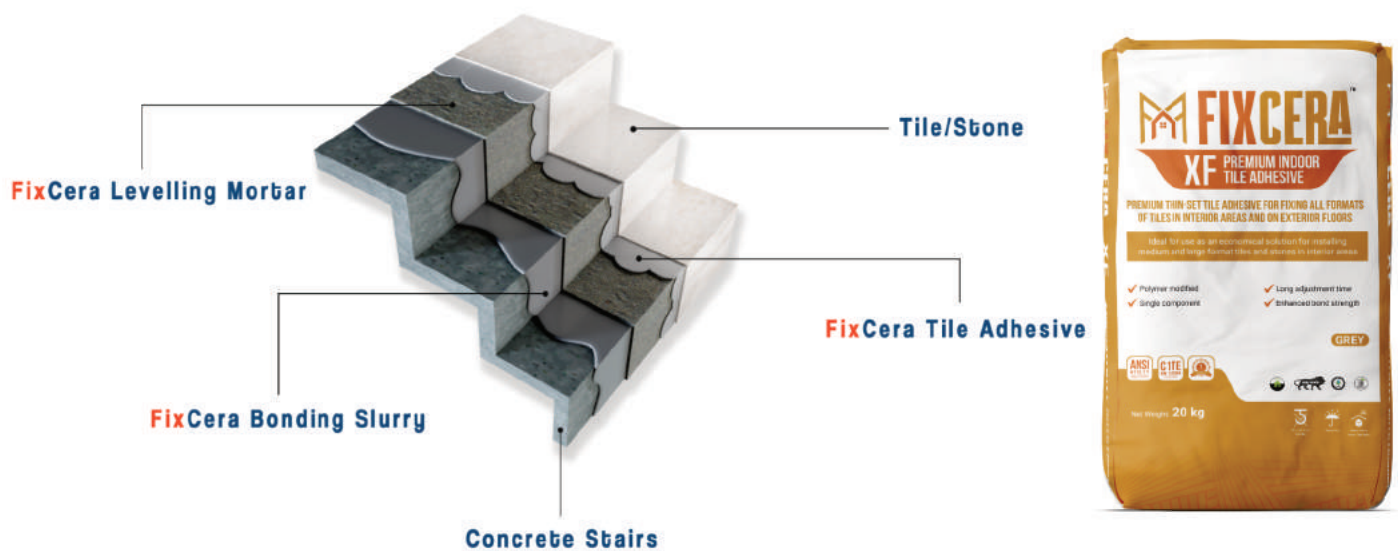

PREMIUM INDOOR TILE ADHESIVE

Premium thin-set tile adhesive for fixing all formats of tiles/ stones in interior areas and on exterior floors

Ideal for use as an economical solution for installing medium and large format tiles/ stones in interior areas

Features and Benefits

- Ideal for vitrified tiles
- Ideal for ceramic tiles and natural stones
- Best suited for interior areas
- Well suited for large format tiles/ stones when used in interior areas
- Single component product
- Excellent workability
- Excellent slump resistance

Application Data

- Mixing Ratio: Approximately 5.5L water/ 20kg bag
- Coverage: 5 - 5.5 m²/ 20kg bag (3mm bed)
- Wet Area Recommended: No
- Colour: Grey and White
- Shelf Life: 12 months from manufacturing
- Pot Life: Approximately 3 hours
- Open Time: 30 minutes
- Adjustment Time: 30 minutes

Compliance/ Certifications: ANSI A118.1TE, C1TE - EN 12004, Type 2T Adhesive - BIS 15477:2019

CATEGORY III: WATER REPELLENT TILE ADHESIVES

- ***FixCera Hydra***
- ***FixCera Hydra XL***
- ***FixCera DampProof XL***



Wet areas such as showers, bathrooms, laundry rooms, steam rooms, etc. are constantly under water exposure. To ensure a lasting tile finish, it is of paramount importance to select the right adhesive system because most adhesives fail in the long-term when constantly exposed to water. At FixCera we have developed the most technologically advanced adhesives for wet areas, not only do these adhesives offer excellent adhesion after water immersion, they are also Water Repellent and thus assist in the prevention of efflorescence, microbial growth, and deterioration.

INDIA'S FIRST WATER REPELLENT TILE ADHESIVES

TILING WET AREAS WITH INTEGRAL WATER RESISTANCE

FIXCERA HYDRA



WATER REPELLENT WET AREA TILE ADHESIVE

Water repellent tile adhesive for fixing all types of tiles and assist in waterproofing

Ideal for resisting damp risings, salt deposits and preventing microbial growth


Features and Benefits

- India's first water repellent tile adhesive
- Suitable for all types of tiles and stones
- Ideal for floors and walls
- Bonds well to most cement based substrates
- Resists damp risings
- Resists microbial growth
- Resists efflorescence
- Shock resistant

Application Data

- Mixing Ratio: Approximately 6.0L water/ 20kg bag
- Coverage: 5 - 5.5 m²/ 20kg bag (3mm bed)
- Wet Area Recommended: Yes
- Colour: Grey and White
- Shelf Life: 12 months from manufacturing
- Pot Life: Approximately 3 hours
- Open Time: 30 minutes
- Adjustment Time: 30 minutes

Compliance/ Certifications: ANSI A118.4TE, C2TE - EN 12004, Type 2T Adhesive - BIS 15477:2019



Terraces and Roofs are particularly important to be secured appropriately. These structures form the outermost barrier that is exposed directly to the fluctuations of external weather and environmental conditions. An adhesive system must be able to withstand all adverse conditions while maintaining its integral strength. FixCera's Water Repellent Adhesives withstand all types of environmental variations and also provide the added benefit of being water repellent forming a protective capsule and preserving the internal structure.

FIXING LARGE TILES WITH INTEGRAL WATER REPELLENCE

FIXCERA HYDRA XL



WATER REPELLENT LARGE FORMAT TILE ADHESIVE

Water repellent and flexible tile adhesive for fixing all formats of tiles in wet and exposed areas

Ideal for preventing water ingress, resist damp risings, assist in waterproofing and prevent efflorescence

Features and Benefits

- India's first water repellent tile adhesives
- Highly flexible
- Resists damp risings
- Resists water ingress
- Aids in waterproofing
- Prevents efflorescence
- Ideal for medium and large format tiles/ stones
- Ideal for roofs, pools, bathrooms

Application Data

- Mixing Ratio: Approximately 6.0L water/ 20kg bag
- Coverage: 5 - 5.5 m²/ 20kg bag (3mm bed)
- Wet Area Recommended: Yes
- Colour: Grey and White
- Shelf Life: 12 months from manufacturing
- Pot Life: Approximately 4 hours
- Open Time: 30 minutes
- Adjustment Time: 35 minutes


Compliance/ Certifications: ANSI A118.4TE, C2TES1 - EN 12004, Type 3TS1 Adhesive - BIS 15477:2019



Installation of tiles in and around swimming pools, immersed areas and other wet areas is critical and requires special expertise. At FixCera we have thoroughly tested our products by mimicking their application environment and ensured that they will stand the test of time.

TILING TO PREVENT WATER INGRESS/ EFFLORESCENCE

FIXCERA DAMPPROOF XL

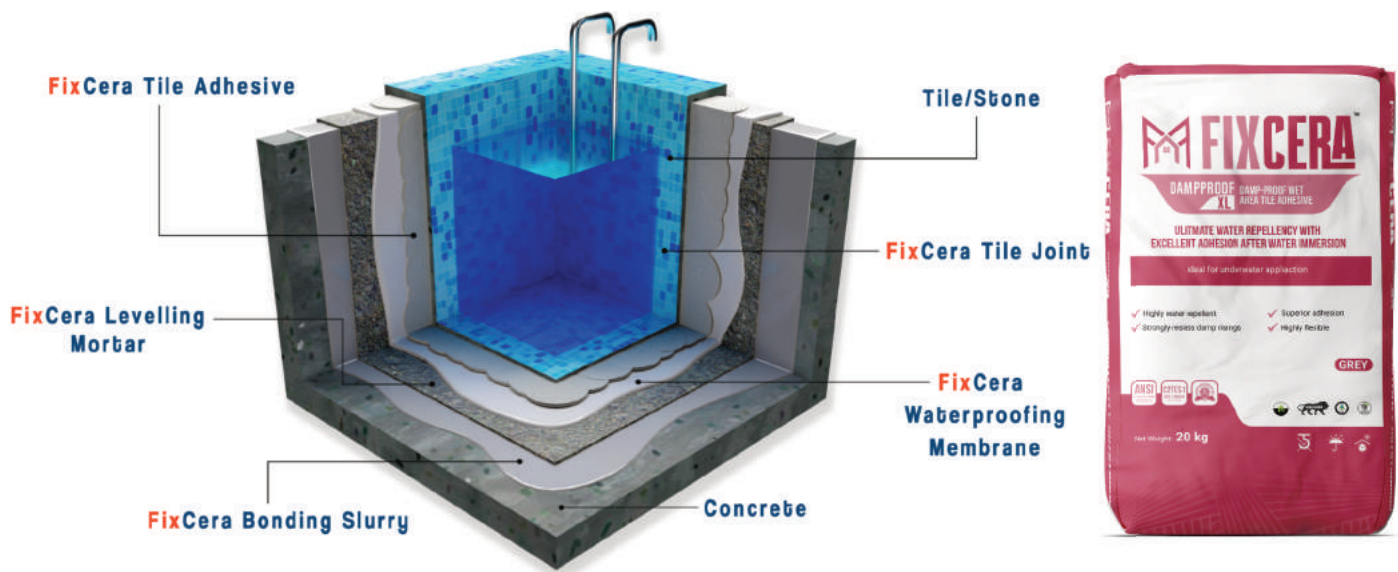

ULTIMATE WET/ EXPOSED AREA TILE ADHESIVE

Exhibits ultimate water repellency with excellent adhesion

Ideal for wet/ exposed/ underwater areas. Ideal for preventing water ingress, resist damp risings/ efflorescence

Features and Benefits

- India's first water repellent tile adhesive
- Ideal for all types of applications
- Resists water ingress
- Breathable
- Resists damp risings
- Prevents efflorescence
- Extremely flexible
- Ideal for exterior walls, pools, terraces

Application Data

- Mixing Ratio: Approximately 6.0L water/ 20kg bag
- Coverage: 5 - 5.5 m²/ 20kg bag (3mm bed)
- Wet Area Recommended: Yes
- Colour: Grey and White
- Shelf Life: 12 months from manufacturing
- Pot Life: Approximately 3 hours
- Open Time: 30 minutes
- Adjustment Time: 30 minutes

Compliance/ Certifications: ANSI A118.4TE, C2TES2 - EN 12004, Type 3T Adhesive - BIS 15477:2019

CATEGORY IV: STONE ADHESIVES


- ***FixCera StoneBed***
- ***FixCera StoneFlex***



Natural Stones have been in use as the surface finish of choice since time immemorial, and continue to be the finish of choice for many applications. Use of FixCera Tile Adhesives allows for the installation of large dimensional stones: Granite, Sandstones and Marbles over various substrates and prevent common issues such as lippage, debonding, and excessive installation costs.

FIXING NATURAL STONES ON INTERIOR/ EXTERIOR FLOORS

FIXCERA STONEBED

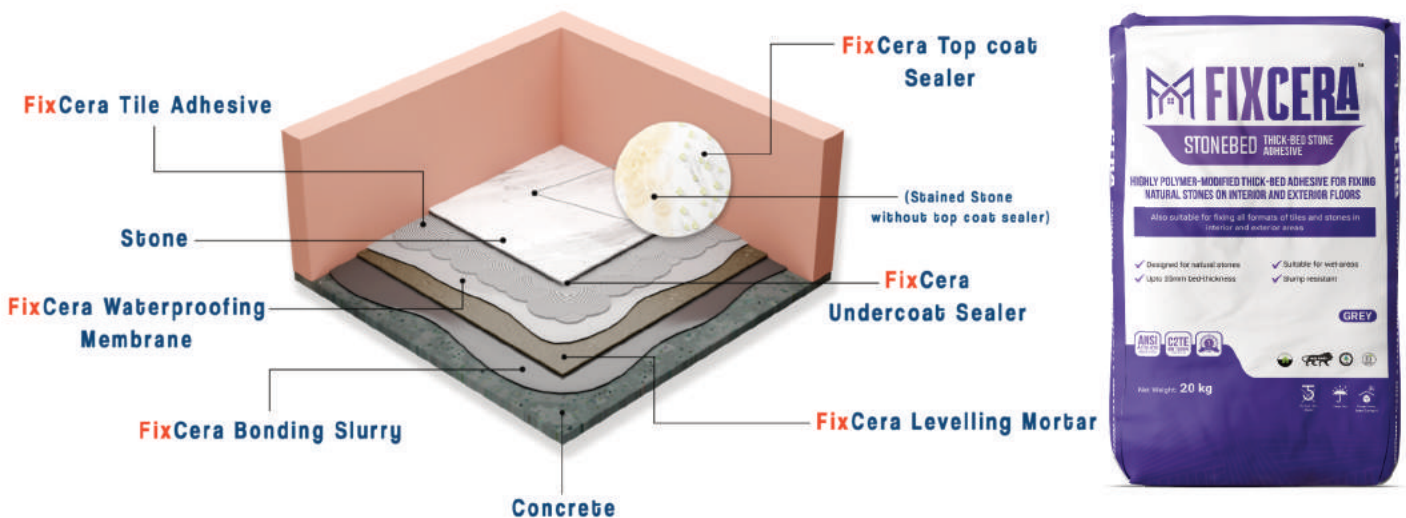

THICK BED STONE ADHESIVE

Highly polymer modified stone adhesive for fixing natural stones on interior and exterior floors

Also suitable for fixing all types of tiles in interior and exterior areas and for tile on tile applications

Features and Benefits

- Maximum bed thickness up to 40mm
- Excellent bond strength
- Excellent slump resistance
- Bonds well to most cement based substrates
- Single component product
- Excellent workability
- Prevents lippage
- No shrinkage

Application Data

- Mixing Ratio: Approximately 4L water/ 20kg bag
- Coverage: 2 - 2.3 m²/ 20kg bag (6mm bed)
- Wet Area Recommended: Yes
- Colour: Grey and White
- Shelf Life: 12 months from manufacturing
- Pot Life: Approximately 3 hours
- Open Time: 20 minutes
- Adjustment Time: 20 minutes


Compliance/ Certifications: ANSI A118.4, C2 - EN 12004, Type 2 Adhesive - BIS 15477:2019



Many Natural Stones are extremely sensitive to moisture and require special care during installation to prevent staining due to water ingress. FixCera offers adhesives specially designed for this application, which also happen to be diverse enough to be applicable for laying other finishes such as vitrified tiles.

FIXING MOISTURE SENSITIVE STONES ON FLOORS/ WALLS

FIXCERA STONEFLEX

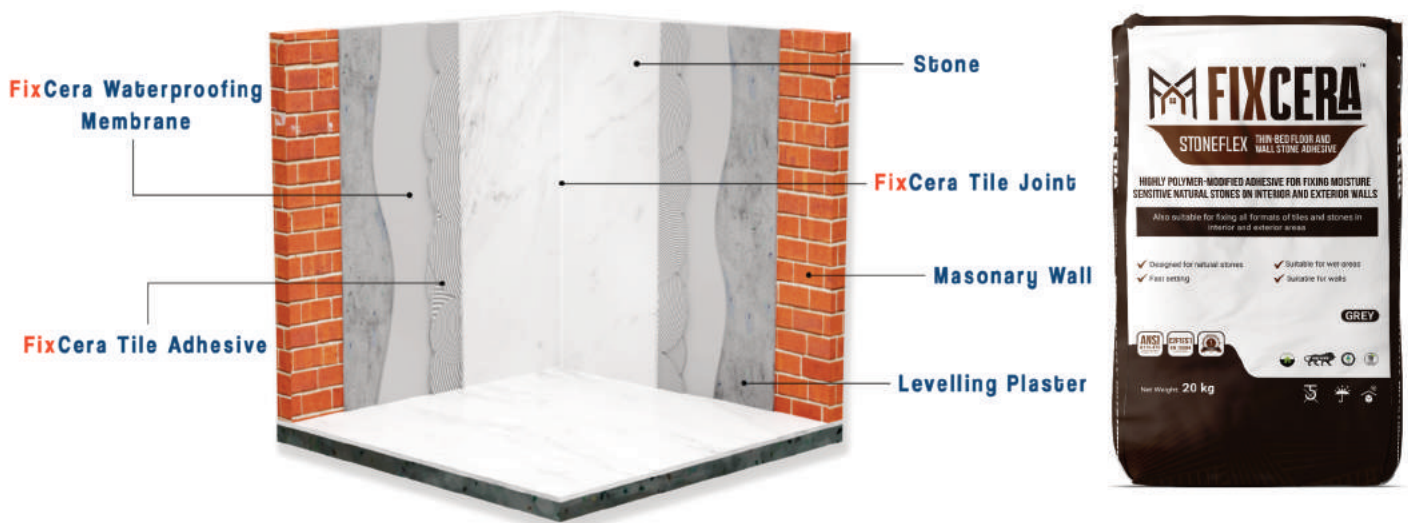

HIGHLY FLEXIBLE FAST SETTING THIN BED FLOOR AND WALL STONE ADHESIVE

Highly polymer modified adhesive for fixing moisture sensitive natural stones on floors and walls

Also suitable for fixing all formats of tiles in interior and exterior areas including wet areas

Features and Benefits

- Designed for natural stones
- Suitable for Marble, Granite, Sandstone
- Also suitable for all types of tiles
- Bonds well to most cement based substrates
- Single component product
- Excellent workability
- Fast Setting
- Easy to level using a suitable notched trowel

Application Data

- Mixing Ratio: Approximately 5.5L water/ 20kg bag
- Coverage: 2 - 2.3 m²/ 20kg bag (6mm bed)
- Wet Area Recommended: Yes
- Colour: Grey and White
- Shelf Life: 12 months from manufacturing
- Pot Life: Approximately 2 hours
- Open Time: 30 minutes
- Adjustment Time: 30 minutes

Compliance/ Certifications: ANSI A118.4TE, C2FTES1 - EN 12004, Type 3TS1 Adhesive - BIS 15477:2019

CATEGORY V: SPECIALTY TILE ADHESIVES

- ***FixCera Curve***
- ***FixCera QuickFix***
- ***FixCera FreeFlow***



For stones and tiles larger than 1200mm x 1200mm it is recommended to use highly deformable tile adhesives with S2 classification. FixCera's Tile Adhesives are extremely flexible and exhibit many other enhanced properties as well such as improved adhesion, greater tackiness and compatibility with most substrates. Highly deformable tile adhesives also find important use in high rise buildings.

FIXING EXTREMELY LARGE TILES/ STONES

FIXCERA CURVE



EXTREMELY FLEXIBLE LARGE FORMAT TILE ADHESIVE

Extremely flexible adhesive for an everlasting bond

Ideal for fixing thin and large tiles/ stones of dimensions greater than 1200mm x 1200mm

Features and Benefits

- Extremely flexible
- S2 classification
- Ideal for use in high rise buildings
- Ideal for thin porcelain/ vitrified tiles
- Ideal for large format tiles/ stones
- Water and shock resistant
- Ideal for wet areas
- Ideal for exterior applications

Application Data

- Mixing Ratio: Approximately 6L water/ 20kg bag
- Coverage: 5 - 5.5 m²/ 20kg bag (3mm bed)
- Wet Area Recommended: Yes
- Colour: Grey and White
- Shelf Life: 12 months from manufacturing
- Pot Life: Approximately 4 hours
- Open Time: 30 minutes
- Adjustment Time: 35 minutes

Compliance/ Certifications: ANSI A118.4TE, C2TES2 - EN 12004, Type 4TS2 Adhesive - BIS 15477:2019



Time is the new currency and quick repair or installation of new floors and walls can have major cost benefits. At FixCera we offer Tile Adhesives that allow for heavy foot traffic within 4-6 hours of installation, and adhesives that can be used to lay tiles over wet levelling mortar using the wet-on-wet method.

TILING WITH MINIMAL DOWN TIME

FIXCERA QUICKFIX



FAST SETTING TILE ADHESIVE

Fast setting thin set adhesive for quick repairs and low down time

Ideal for fixing all types of tiles and moisture sensitive natural stones in interior and exterior areas

Features and Benefits

- Fast setting
- Foot to traffic in less than 6 hours
- Ideal for all types of tiles
- Ideal for moisture sensitive stones
- Single component product
- Excellent workability
- Excellent bond strength
- Eco-friendly and recyclable


Application Data

- Mixing Ratio: Approximately 5.5L water/ 20kg bag
- Coverage: 5 - 5.5 m²/ 20kg bag (3mm bed)
- Wet Area Recommended: Yes
- Colour: Grey and White
- Shelf Life: 12 months from manufacturing
- Pot Life: Approximately 1.5 hours
- Open Time: 20 minutes
- Adjustment Time: 25 minutes

Compliance/ Certifications: ANSI A118.4FT, C2FT - EN 12004, Type 2T Adhesive - BIS 15477:2019

LAYING TILES USING WET ON WET METHOD

FIXCERA FREEFLOW

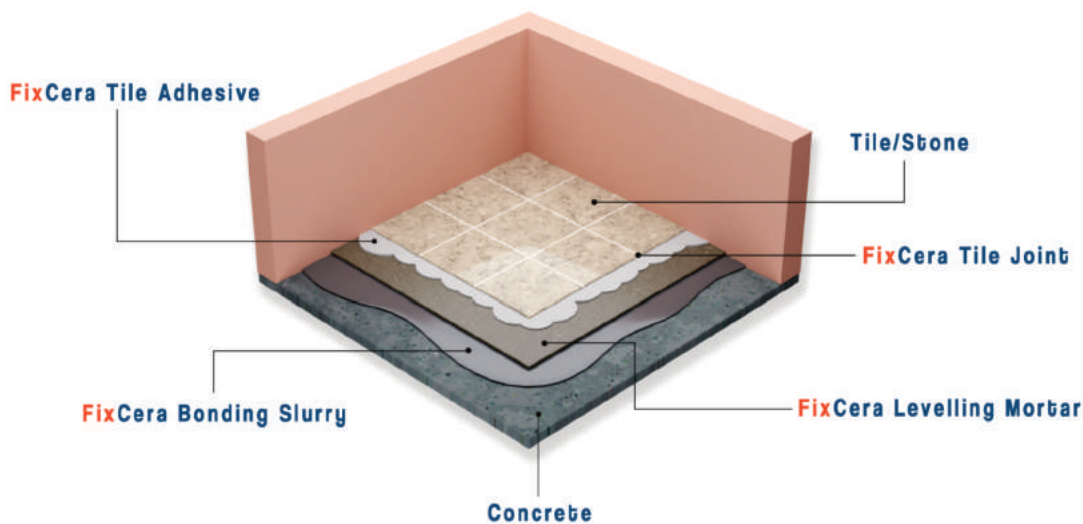

SLURRY TILE ADHESIVE

Free flowing adhesive for fixing tile and stones using the wet on wet method

Also suitable for fixing all types of tiles and stones in interior and exterior areas including wet areas

Features and Benefits

- Can be used in various consistencies
- Suitable for wet areas
- Suitable for all types of tiles/ stones
- Polymer modified
- Single component product
- Eco-friendly and recyclable

Application Data

- Mixing Ratio: Approximately 7.2L water/ 20kg bag
- Coverage: 7.8 - 8.3 m²/ 20kg bag (2mm bed)
- Wet Area Recommended: Yes
- Colour: Grey
- Shelf Life: 12 months from manufacturing
- Pot Life: Approximately 5 hours
- Open Time: 30 minutes
- Adjustment Time: 35 minutes

Compliance/ Certifications: ANSI A118.4E, C2E - EN 12004, Type 2 Adhesive - BIS 15477:2019



TILE ADHESIVE RECOMMENDATION CHART

✓ SUITABLE ✓✓ IDEAL

		GENERAL PURPOSE			MULTI PURPOSE				WATER REPELLENT			STONE		SPECIALIZED			
		Eco	Eco V	XF	XV	XL	T1T	Limitless XL	Hydra	Hydra XL	DampProof XL	StoneBed	StoneFlex	QuickFix	FreeFlow	Curve	
CHARACTERISTIC	BIS Adhesive Type	Type 1T	Type 1T	Type 2T	Type 3T	Type 3TS1	Type 3T	Type 3TS1	Type 2T	Type3TS1	Type 3TS2	Type 2	Type 3TS1	Type 2T	Type 2	Type 4TS2	
	EN 12004 Class	C1	C1	C1	C2	C2	C2	C2	C2	C2	C2	C2	C2	C2	C2	C2	C2
	Setting												F	F			
	Slip Resistance	T	T	T	T	T	T	T	T	T	T		T	T			T
	Open Time			E	E	E	E	E	E	E	E		E		E		E
	Deformability					S1		S1		S1	S2		S1				S2
	Adjustment Time	20 min	20 min	30 min	40 min	40 min	35 min	40 min	30 min	35 min	30 min	20 min	30 min	25 min	35 min	35 min	35 min
	Recyclable	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓
	Maximum Bed Thickness	12 mm	12 mm	12 mm	15 mm	15 mm	12 mm	15 mm	12 mm	15 mm	15 mm	40 mm	25 mm	12 mm	12 mm	15 mm	
	Wet-On-Wet Suitable					✓		✓✓		✓✓	✓		✓	✓	✓	✓✓	✓✓
	Exterior Suitable			✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓
	Wet Area Suitable				✓	✓✓	✓	✓✓	✓✓	✓✓	✓✓	✓	✓✓	✓	✓✓	✓✓	✓✓
	Water Resistant					✓		✓	✓✓	✓✓	✓✓		✓	✓	✓		✓✓
	Water Repellent								✓	✓✓	✓✓						✓
	Coverage	5-5.6m2/20kg bag (3mm bed)	5-5.6m2/20kg bag (3mm bed)	5-5.5m2/20kg bag (3mm bed)	5-5.5m2/20kg bag (3mm bed)	5-5.5m2/20kg bag (3mm bed)	5-5.5m2/20kg bag (3mm bed)	5-5.5m2/20kg bag (3mm bed)	5-5.5m2/20kg bag (3mm bed)	5-5.5m2/20kg bag (3mm bed)	5-5.5m2/20kg bag (3mm bed)	5-5.5m2/20kg bag (3mm bed)	2-2.3m2/20kg bag (6mm bed)	2-2.3m2/20kg bag (6mm bed)	5-5.5m2/20kg bag (3mm bed)	7.8-8.3m2/20kg bag (2mm bed)	5-5.5m2/20kg bag (2mm bed)
SUBSTRATE - INTERIOR	Cement Based	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	
	Brick Masonary	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	
	Existing Ceramic Tile				✓✓	✓✓	✓✓	✓✓	✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓	✓✓	
	Existing Stone				✓✓	✓✓	✓✓	✓✓	✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓	✓✓	
	Existing Vitrified Tile				✓✓	✓✓	✓✓	✓✓	✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓	✓✓	
	Existing Glass Mosaic				✓	✓✓	✓	✓✓		✓✓	✓✓	✓	✓✓	✓		✓✓	
	Cement Backer Board					✓		✓		✓	✓		✓			✓✓	
	Calcium Silicate Board					✓		✓		✓	✓		✓			✓✓	
	Gypsm Wall Board					✓		✓		✓	✓		✓			✓✓	
	Exterior Grade Plywood					✓		✓		✓	✓		✓			✓✓	
SUBSTRATE - EXTERIOR	Cement Based	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	
	Brick Masonary	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	
	Existing Ceramic Tile				✓✓	✓✓	✓✓	✓✓	✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓	✓✓	
	Existing Stone				✓✓	✓✓	✓✓	✓✓	✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓	✓✓	
	Existing Vitrified Tile				✓✓	✓✓	✓✓	✓✓	✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓	✓✓	
	Existing Glass Mosaic				✓	✓✓	✓	✓✓		✓✓	✓✓	✓	✓✓	✓		✓✓	
APPLICATION AREA	Living Area	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	
	Wet Area				✓	✓✓	✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	
	Submerged Area/Swimming Pool					✓✓		✓✓	✓	✓✓	✓✓	✓✓	✓✓	✓	✓	✓✓	
	Facade			✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	
	Heavy Traffic Area				✓✓	✓✓	✓✓	✓✓	✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	
	Underfloor Heating					✓✓		✓✓		✓	✓✓	✓	✓✓	✓	✓✓	✓✓	
SURFACE	Floor	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓	
	Wall	✓	✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓	✓✓	
FINISH	Ceramic Tiles	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	
	Natural Stones	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	
	Vitrified Ceramic		✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	
	Fully Vitrified			✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	
	Glass Mosaics			✓	✓✓	✓✓	✓	✓✓	✓	✓✓	✓✓	✓✓	✓✓	✓	✓	✓✓	
	Large Format			✓	✓	✓✓	✓	✓✓	✓	✓✓	✓✓	✓✓	✓✓	✓	✓✓	✓✓	
	Water-Sensitive Natural Stones							✓		✓✓	✓		✓✓	✓	✓✓	✓✓	



www.fixcera.com

1800-547-0247

support@fixcera.com



Search 'FixCera'

Disclaimer

The information and any recommendation, technical or otherwise, contained within this document are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purpose. In no event shall Samrat Coatings and Adhesives Pvt Ltd assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. Samrat Coatings and Adhesives Pvt Ltd expressly disclaims any representations and warranties of any kind, whether express or implied, as to the accuracy, completeness, non-infringement, merchant-ability and/ or fitness for a particular purpose (even if Samrat Coatings and Adhesives is aware of such purpose) with respect to any information and recommendations provided. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Samrat Coatings and Adhesives Pvt Ltd reserves the right to make any changes to the information and/ or recommendations at any time, without prior or subsequent notice.